


### INSTALLATION INSTRUCTIONS

Description:	System Monitor	Part Number: 990C0-80008/80108
Applications:	Suzuki Marine Boats	Installation Time: 1 HRS
NOTE:	Mounts in standard 2 1/16" hole.	Weight: 1 lbs

### Contents

Ref.	Part Number	Description	QTY
1.	990C0-80008/80108	System Monitor Gauge	1
2.	BC0128	Mounting Bracket	1
3.	Mounting Hardware		1

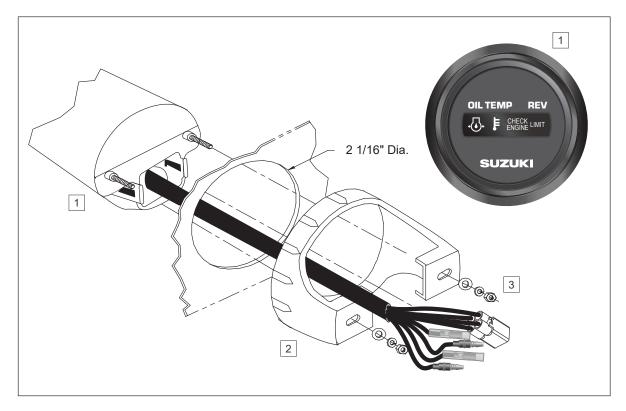

# Tools Required

Ref.	<b>Tools Description</b>	Tools Description			
1.	5/16" Nut Driver				
2.	Suzuki Terminal Kit	09900-28701			



## Important

Please read this manual and follow its instructions carefully. To emphasize special information, the symbol and the words **WARNING**, **CAUTION** and **NOTE** have special meanings. Pay special attention to the messages highlighted by these signal words:

**NOTE:** Indicates special information to make maintenance easier or instructions clear.

#### **A** WARNING

Indicates potential hazard that could result in death or injury.

#### **A** CAUTION

Indicates potential hazard that could result in vehicle damage.



### **A** CAUTION

- Disconnect battery during installation.
- Tighten nuts on backclamp only slightly more than you can tighten with your fingers. Six inch-pounds of torque is sufficient. Over tightening may result in damage to the instrument and may void your warranty.
- Gasket cement or other adhesive is not required to secure tubing to fittings.

### Installation

- **1.** Cut a 2 1/16" dia. hole in the dash and mount the gauge with the backclamp supplied.
- 2. To connect the instrument, align the keys on the gauge's wire harness plug with the engine MONITOR harness (#36682-92E00) instrument's receptacle. Push the plug in gently until the catches snap in place.
- **3.** Connect the Gray wire (Ignition) and the Black (Ground) to the Suzuki harness.






Figure 1





# Harness Diagram

### HN0409 rev A ecr 5609 8/05

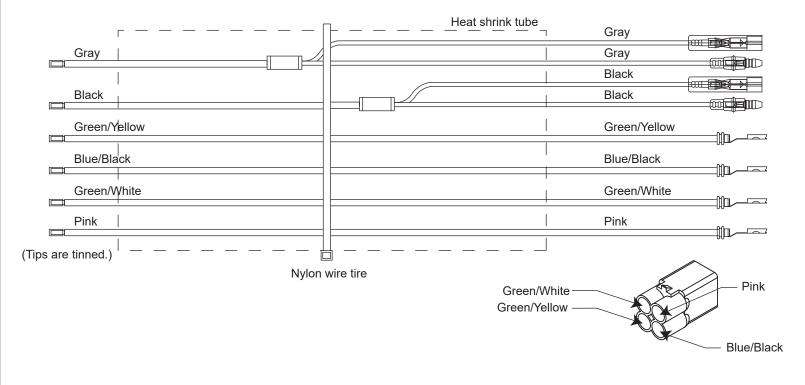

Trouble Shooting

Trouble Inspection Diagnosis

There are no trouble shooting conditions.

Action